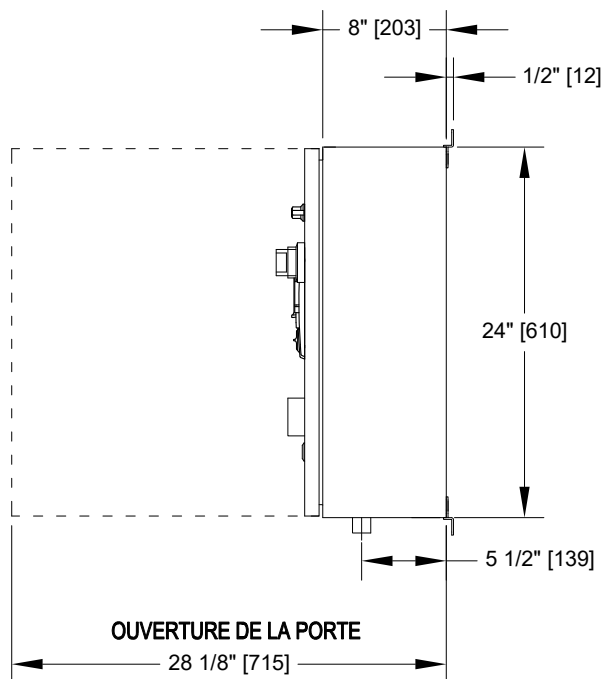
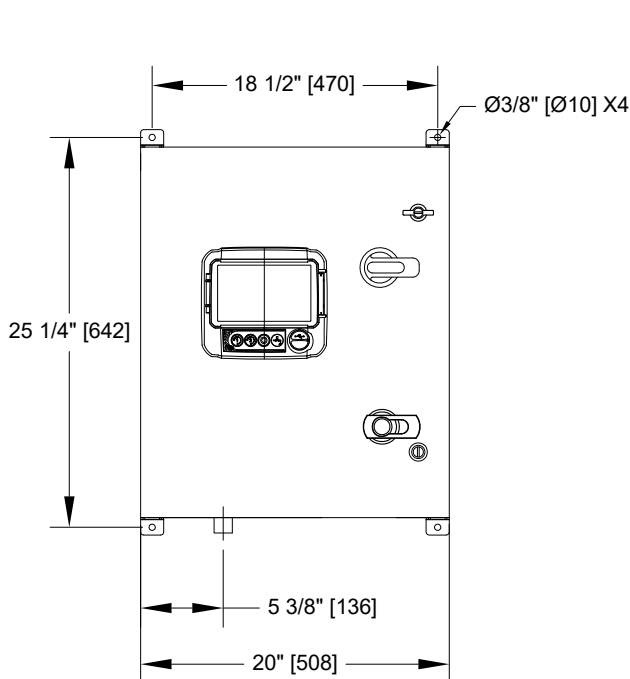


VOLT/Hz	PUISSANCE EN HP		TENUE AUX C.C [kA] RMS	
	MIN HP	MAX HP	STANDARD	HAUTE (OPT. D13A)
1 PHASE				
200-208 / 60	3 HP	15 HP	65kA	N/A
230-240 / 50-60	3 HP	15 HP	65kA	N/A
3 PHASES				
200-208 / 60	3 HP	30 HP	65kA	N/A
230-240 / 50-60	3 HP	30 HP	65kA	N/A
380-415 / 50-60	3 HP	30 HP	25kA	65kA
440-480 / 50-60	3 HP	30 HP	25kA	65kA
575-600 / 60	3 HP	30 HP	18kA	25kA

NOTES :

- Standard NEMA : NEMA 2.
- Les dimensions sont en pouces [millimètres].
- Paint : Texture rouge RAL 3002.
- Utiliser des raccords électriques étanches.
- Protéger contre les copeaux pendant le perçage.
- Température ambiante : Entre 39°F (4°C) et 104°F (40°C).
- Montage sismique mural et base rigide seulement.

Dessin pour information seulement.

Le fabricant se réserve le droit d'apporter des changements sans préavis.

Contactez le fabricant pour des schémas tel que construit.



REV.	DESCRIPTION	DD/MM/YY	No. de Dessin
1.	Revised logo	18/06/18	GPL-DI600 /F
0.	First issue	17/11/16	