



Diesel Engine Fire Pump Controller

Combined Fuel Level Switch Schematic


Model :GPD

Built to the latest edition of the NFPA 20 standard

VER.	DESIGNED BY	 
REV.	DESCRIPTION	
0	FIRST ISSUE	DATE 28/08/13
1	New Design	DATE 10/11/15

Drawing No. GPD-FL003 /E

GPD-FLOAT

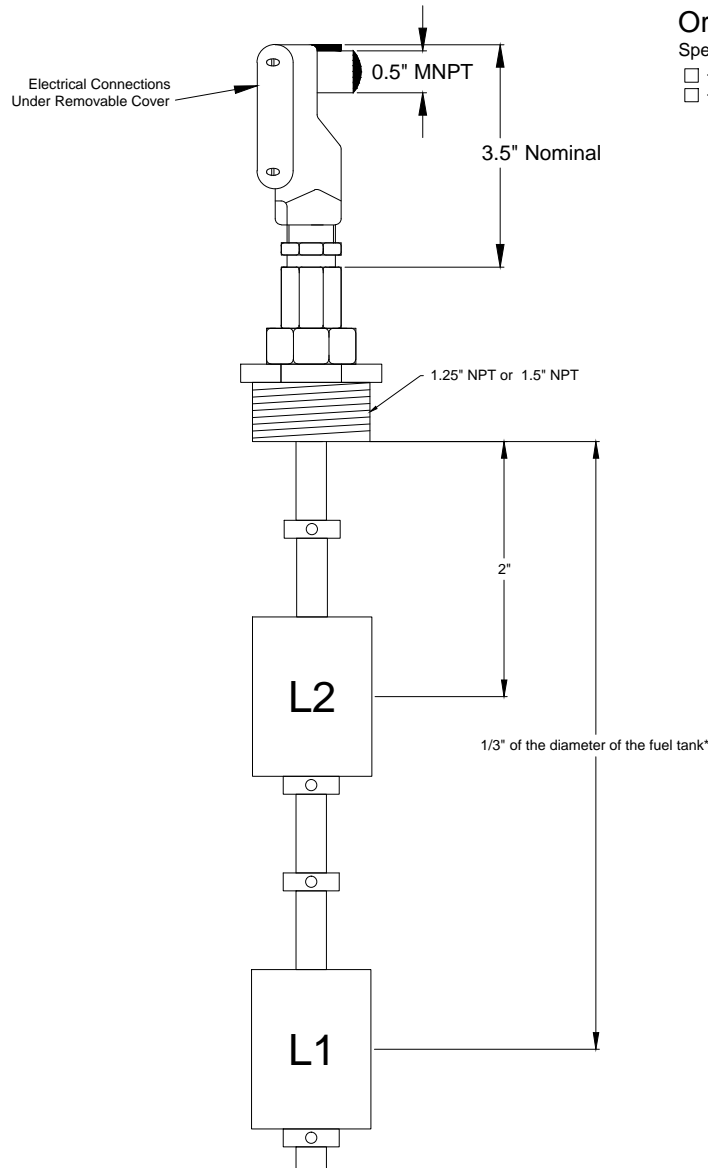

Ordering Instructions

Specify Fitting Size :


- ☐ - 1.25" (1-1/4") NPT (Option D26)
- ☐ - 1.50" (1-1/2") NPT (Option D26A)

Float Switch Connections

Contact Rating:


Maximum 250V, 20W
(Switch REED)
Pilot Duty Switch

Float Switch Configuration


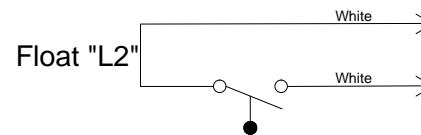


Float "L2"

The contact is OPEN when float is above the liquid level.



The contact is CLOSED when the float is in the liquid

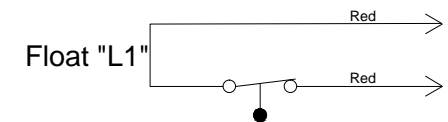

Float "L1"

The contact is CLOSED when float is above the liquid level.

The contact is OPEN when the float is in the liquid

* Please, specify Fuel Tank diameter when ordering.

Drawing for information only.
Manufacturer reserves the right to modify this drawing without notice.
Contact manufacturer for "As Built" drawing.