
Electric Fire Pump Controller With Automatic Transfer Switch

Model: GPA/GPP/GPY +GPU Built to the latest edition of the NFPA 20 standard

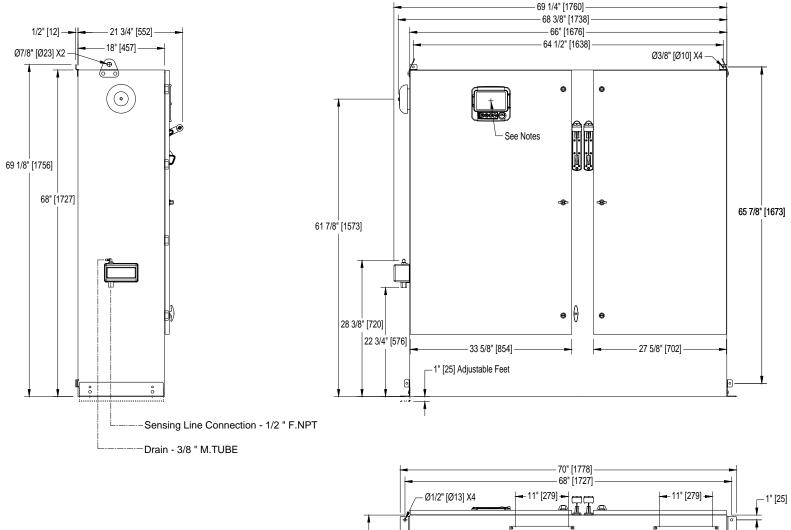

Voltage / Power Table		
Voltage	Min HP	Max HP
208	Not Applicable	
220 - 240	Not Applicable	
380 - 400 - 415	350	
440 - 480	450	
600	Not Applicable	

11 1/8" [284] Normal Emergency Power and 11" [279] Power 16" [406] Motor Leads Entrance Entrance 3" [76] 1 1/4" [31] 🗕 3 1/2" [89] 1" [25] 33" [838]

Notes:

- Standard NEMA: NEMA 2
- Standard paint : textured red RAL 3002.
- All dimensions are in inches [millimeters].
- Center of ViZiTouch screen: 61-5/8" [1564] from Bottom.
- Bottom conduit entrance through removable gland plate recommended.
- Use watertight conduit and connector only.
- Protect equipment against drilling chips.
- Door swing equal to door width.
- Seismic mounting to be rigid wall and base only.

Projection Manufacturer reserves the right to modify this drawing without notice. Contact manufacturer for "As Built" drawing. (\oplus) DD/MM/YY Drawing number REV. DESCRIPTION 2. New Logo 10/05/18 NYC of Building Box Size Revision and Valve Change 1. 21/11/17 GPX-DI365 /E 0. First issue 16/11/16 CDL

Drawing for information only.