
Electric Fire Pump Controller


Dimensions

Built to the latest edition of the NFPA 20 standard

39 1/4" [998]

Model: GPR/GPW

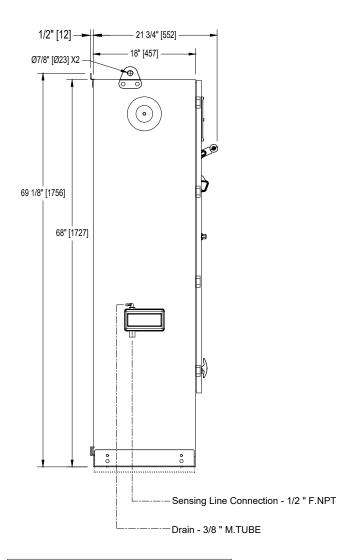

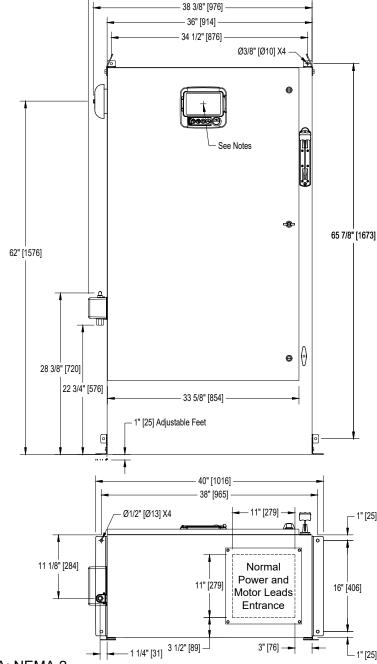

Voltage / Power Table Voltage Min HP Max HP 208 75 150 220 - 240 100 200 380 - 400 - 415 300 150 440 - 480 450 200 600 250 500

Notes:

- Standard NEMA: NEMA 2
- Standard paint : textured red RAL 3002.
- All dimensions are in inches [millimeters].
- Center of ViZiTouch screen: 61-5/8" [1564] from Bottom.
- Bottom conduit entrance through removable gland plate recommended.
- Use watertight conduit and connector only.
- Protect equipment against drilling chips.
- Door swing equal to door width.

Drawing for information only.

Manufacturer reserves the right to modify this drawing without notice.

Contact manufacturer for "As Built" drawing.







	REV.	DESCRIPTION	DD/MM/YY	Drawing number
	4.	Removed Seismic logo (optional)	18/05/22	
	3.	HP Table Modified	22/12/20	GPX-DI370 /E
	2	New Logo	10/05/18	[CDI]

Projection

pht © 2022 Tomatech Inc. All right reserved. This drawing and the information contained or depicted herein are the sole property of Tomatech inc. Copies are communicated to the recipient in stict confidence and may not be retransmitted, published, reproduced, copied or used in any manner, including as the basis for the manufacture or sale of any products, without the express prior written consent of Tomatech inc.