

## Electric Fire Pump Controller With Automatic Transfer Switch

Model: GPS +GPI

+GPU
Built to the latest edition of the NFPA 20 standard

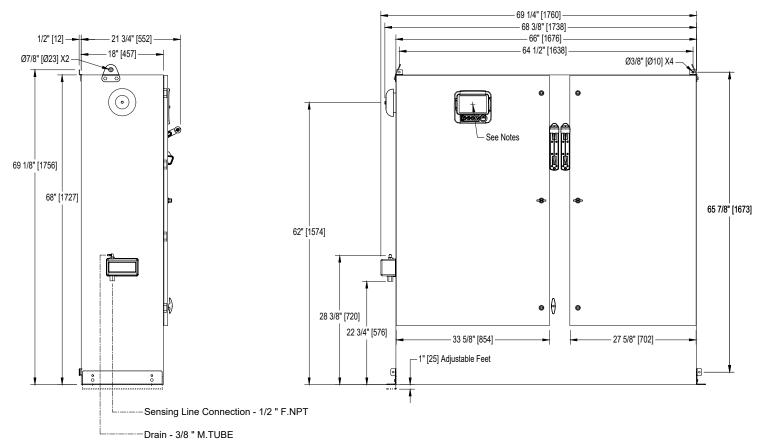

Voltage / Power Table				
Voltage	Min HP	Max HP		
208	Not Applicable			
220 - 240	150			
380 - 400 - 415	250			
440 - 480	300			
600	400			

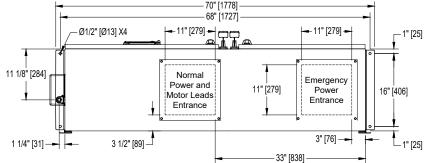

## Notes:

- Standard NEMA: NEMA 2
- Standard paint : textured red RAL 3002.
- All dimensions are in inches [millimeters].
- Center of ViZiTouch screen: 61-5/8" [1564] from Bottom.
- Bottom conduit entrance through removable gland plate recommended.
- Use watertight conduit and connector only.
- Protect equipment against drilling chips.
- Door swing equal to door width.

Drawing for information only.

Manufacturer reserves the right to modify this drawing without notice.

Contact manufacturer for "As Built" drawing.







REV.	DESCRIPTION	DD/MM/YY	/ Drawing number
4.	Removed Seismic logo (optional)	18/05/22	
3.	Revised HP	24/01/19	GPX-DI384
2.	New Logo	10/05/18	CDL

