



© Tornatech, Inc. Not for construction.
Subject to change without notice.

BY	DD/MM/YY
DRAWN BY	PY
01/03/24	
FINAL APPROVAL	GT
23/02/23	

ELECTRIC FIRE PUMP CONTROLLER REDUCED VOLTAGE / WYE DELTA (OPEN TRANSITION)



MODEL: HFY

BUILT TO THE LATEST EDITION OF THE EN 17451 STANDARD




THIRD ANGLE
PROJECTION

DRAWING NUMBER	HFY-D1928/E
DWG REV. 0	
SHEET 1 OF 1	

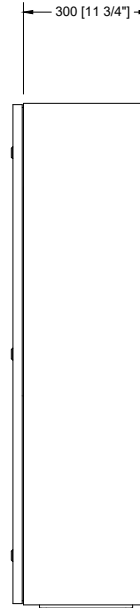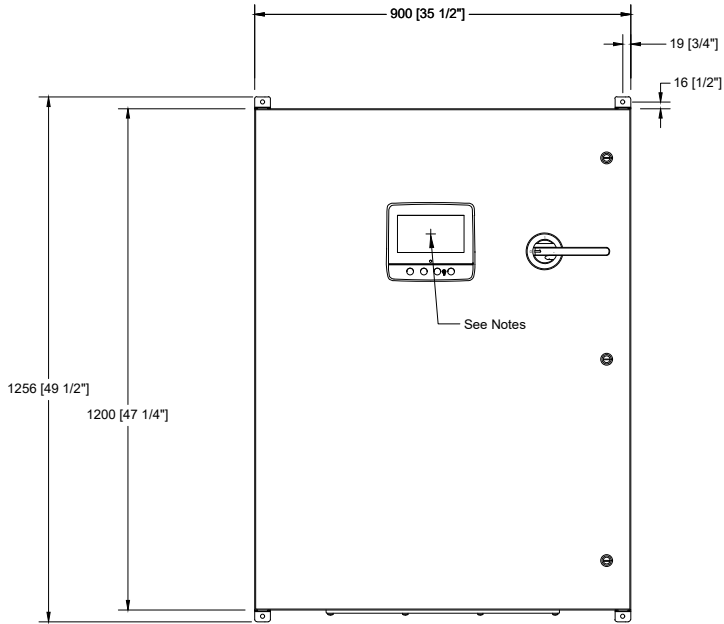

Voltage	Min	Max
400	110 kW	200 kW

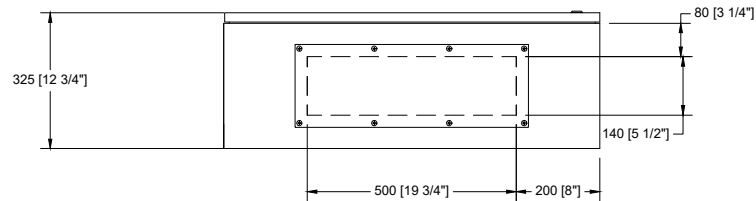

Notes:

- Standard: IP55
- Standard paint : textured red RAL 3002.
- All dimensions are in millimeters [inches].
- Center of screen: 900 [35-1/2"] from bottom.
- Bottom conduit entrance through removable gland plate recommended.
- Use watertight conduit and connector only.
- Protect equipment against drilling chips.
- Door swing equal to door width.