

HFx

Electric Engine Fire Pump Controllers Built To EN12845

Standard Features

- ViZiTouch Light operator interface
- IP55 enclosure
- Event recorder
- Fusible disconnect
- Voltage (3ph) and amperage (1ph) display
- Run test push button
- Start and stop pushbuttons
- Phase reversal indication
- Provision to connect pressure switches (2) by others
- Gland plate
- Alarm bell
- Alarm contacts for remote indication (SPDT):
 - Motor running
 - Power available
 - Phase reversal
 - Pump room alarm
 - Motor trouble



1. ViZiTouch Light operator interface
2. Audible alarm
3. External USB port
(internal USB Port also supplied)
4. Disconnect handle
5. Remote alarm contacts with removable terminals
6. Gland plate
7. Wye-Delta open transition starter
8. Fusible disconnect





ViZiTouch Light Operator Interface




ViZiTouch Light operator interface

Major features include:

- 4.2" color touch screen
- Expandable storage
- Multi-language
- Upgradable software
- Password protected

HOME

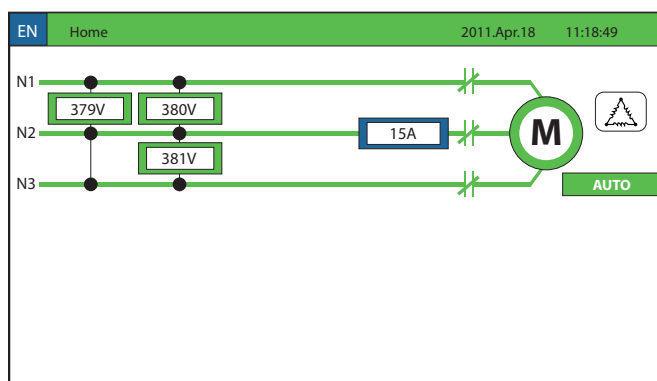

HISTORY/STATISTICS

EN	History > All Time Statistics	2015. Feb.22	9:13:13
First Power Up 2011.09.16 08:29:04 First Start Up 2011.09.16 08:29:04 On Time 46.07.43			

EVENTS

EN	History > Events Log	2015 Feb. 22	14:40:10
	Date	Time	Message
1	2015.02.22	14:18:20	User 1 Logged In
2	2015.02.22	15:59:27	Under Voltage OCCURED
3	2015.02.22	13:59:27	Under Voltage ACTIVE
4	2015.02.22	13:58:21	Alarms Reset
5	2015.02.22	13:54:25	Control Voltage Returned
6	2015.02.22	13:54:05	User 1 Logged Off
7	2015.02.22	13:54:05	Alarms Resetted
8	2015.02.22	13:54:05	Controller Ready
9	2015.02.22	13:54:05	Loss of Power: OCCURED
10	2015.02.22	13:54:05	Controller Shutting Down

HfX SERIES

380V - 400V - 415V 3 ph / 50 hz	HFA-HFY
	Approx. Dimensions in mm
5 Kw - 55 Kw	600 h x 500 w x 210 d
110 Kw - 250 Kw	1000 h x 800 w x 300 d

HOW TO ORDER: HfX - V/ kW/ Ph/ Hz/ - Options
Ex: HFA -400/ 55/ 3/ 50/ Options

AMERICAS
Tornatech Inc.
Head Office
Laval, Québec, Canada
Tel: + 1 514 334 0523
Toll free: + 1 800 363 8448

EUROPE
Tornatech Europe SPRL
Wavre, Belgium
Tel: + 32 (0) 10 84 40 01