
## Electric Fire Pump Controller Reduced Voltage / Wye-Delta (Open Transition)



## Built to the latest edition of the LPS 1237

Designation	Label Text
IS1	ISOLATING SWITCH
PB1	EMERGENCY START
PB2	STOP/RESET
PB3	LAMP TEST
PL1	AC SUPPLY HEALTHY
PL2	PUMP RUNNING
PL3	PUMP ON DEMAND
PL4	START FAILURE

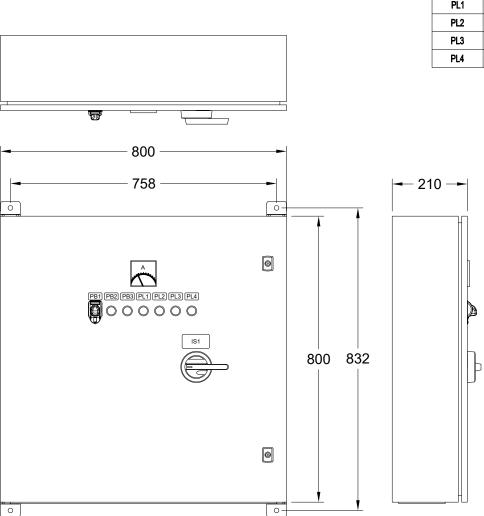

## Notes:

- IP55 assembly
- All dimensions are in millimeters
- Paint: textured red RAL 3002
  Bottom conduit entrance through removable gland plate recommended

ned or depicted herein are the sole property of Tor

ch Inc. Copies are o

- Use watertight conduit and connector only
- Protect equipment against drilling chips
- Ambient temperature : between 4°C and 40°C
- Controller weight: approximately 20 Kg
- Shipping weight: approximately 35 Ka

Drawing for information only. Manufacturer reserves the right to modify this draw Contact manufacturer for "As Built" drawing.



ed. This drawing and the in

Voltage / Power Table			
Voltage	Min kW	Max kW	
400	90	110	

awing without notice.	
REV. DESCRIPTION DD/MM/YY Drawing number	
C General revision 07/12/16 3 General revision 29/08/17 L EX-DI003 /E	
LFY-DI003 /E	
4 Revised logo 18/06/18	

ing as the b

. ent in strict

nce and may not be ret

Dimensions