



© Tornatech, Inc. Not for construction.
Subject to change without notice.

| | | |
|----------------|-----|----------|
| BY | | DD/MM/YY |
| DRAWN BY | ACD | 06/02/24 |
| FINAL APPROVAL | FC | 06/02/24 |


DIESEL ENGINE FIRE PUMP CONTROLLER COMBINED FUEL LEVEL SWITCH

MODEL: GPD

BUILT TO THE LATEST EDITION OF THE NFPA20 & NFPA70



| | |
|----------------|-------------|
| DRAWING NUMBER | GPD-FL003/E |
| DWG REV. | 3 |
| SHEET | 1 OF 1 |

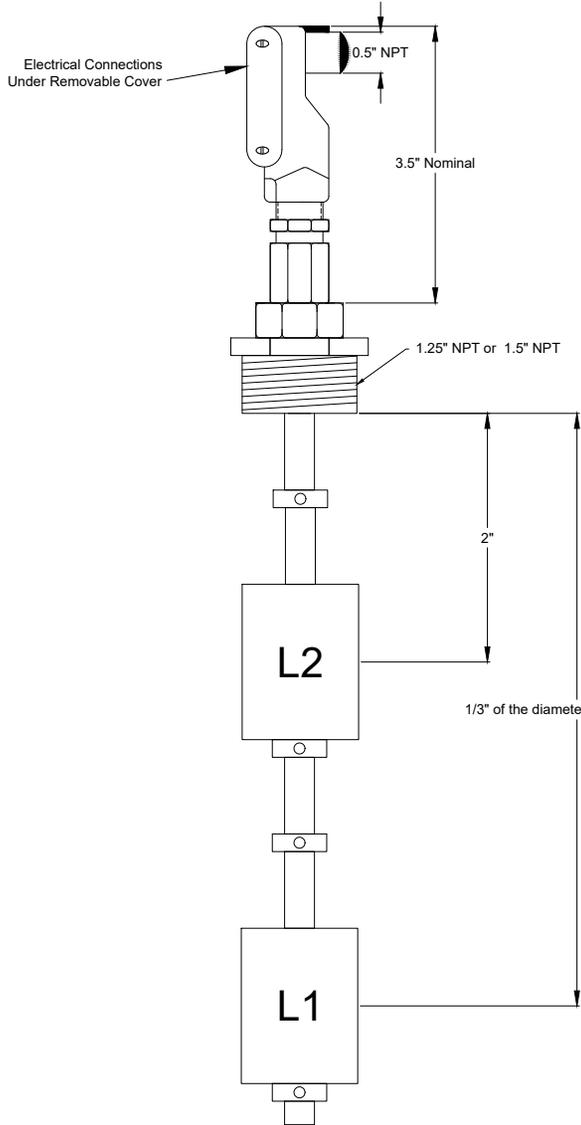


Ordering Instructions



- Specify Fitting Size :
- 1.25" (1-1/4") NPT (Option D26)
 - 1.50" (1-1/2") NPT (Option D26A)

Float Switch Configuration


Contact Rating:
Maximum 0-30 VDC, 0.3 A
(Switch REED)
Pilot Duty Switch

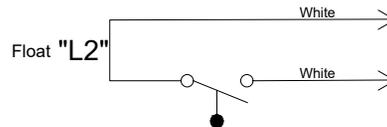

The contact is OPEN when float is above the liquid level.

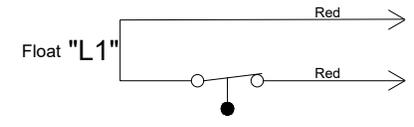

The contact is CLOSED when float is above the liquid level.



The contact is CLOSED when the float is in the liquid

The contact is OPEN when the float is in the liquid

Drawing for information only.
Manufacturer reserves the right to modify this drawing without notice.
Contact manufacturer for "As Built" drawing.

* Please, specify Fuel Tank diameter when ordering.