

LFY

Electric Fire Pump Controllers


Standard Features

- Built to LPS1237 standard
- Enclosure:
 - IP55
 - Gland plate
- Isolating switch (fused)
- Amperage (1ph) display
- Pilot lights
 - AC supply healthy
 - Pump running
 - Pump on demand
 - Start failure
- Push buttons:
 - Emergency start (lockable cover)
 - Stop / Reset
 - Lamp Test
- Provision to connect pressure switches (4) by others



MODEL LFY

400V / 3ph / 50hz	
kW	Approx. Dimensions in mm
5.5 - 22	500 h x 500 w x 210 d
30 - 75	600 h x 600 w x 210 d
90 - 110	800 h x 800 w x 210 d
132 - 250	800 h x 1000 w x 300 d

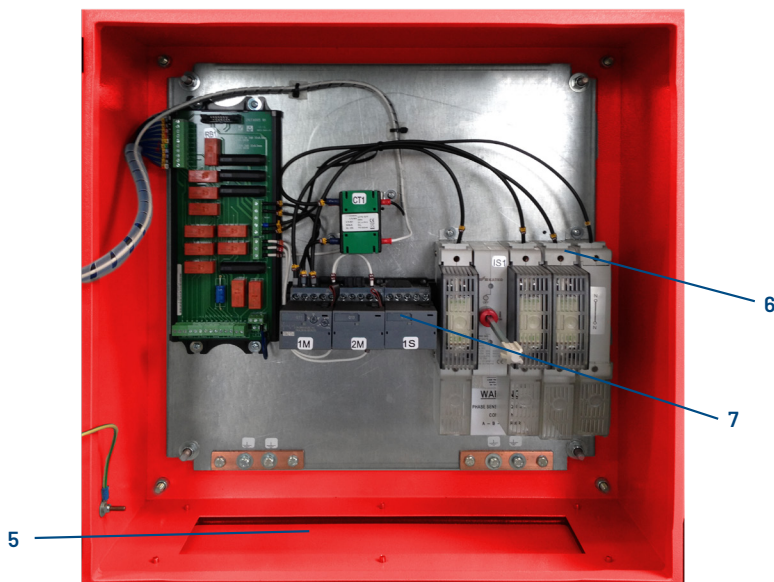

1. Push buttons
2. Ammeter
3. Pilot lights
4. Isolating switch operating handle
5. Gland plate
6. Isolating switch (fused)
7. Wye-Delta open transition starter

HOW TO ORDER: LFY - V/ kW/ Ph/ Hz
 Ex: LFY -400/ 22kW/ 3Ph/ 50Hz

AMERICAS
 Tornatech Inc.
 Head Office
 Laval, Québec, Canada
 Tel: + 1 514 334 0523
 Toll free: + 1 800 363 8448

EUROPE
 Tornatech Europe SA
 Mont-Saint-Guibert, Belgium
 Tel: + 32 (0) 10 84 40 01